



Door Type Dishwasher-AM60K

SIMPLE / EFFICIENT / RELIABLE



Easy operation - Operator friendly

- Lightest 2 Kg door lift in the industry
- Simple to use, front mounted controls, automatic fill and door cycle switch
- Select 60 or 90 second wash programs
- Monitor temperatures on LED wash and rinse temperature display
- Easy service access, all components serviceable from machine front

Outstanding wash results - Clean dishes

- Integrated and insulated rinse booster is energy efficient and provides final rinse for maximum machine capacity
- Standard rinse pump assures sanitizing rinse independent of actual water pressure
- Thermostop feature guarantees 82°C final rinse
- Rotating wash system for ideal water distribution


Saves energy and operation cost - Environmental friendly

- Energy efficient fully enclosed upper wash chamber prevents heat and steam loss when doors are open
- Self-flushing strainer system collects large food particles for easy removal
- Large 20 litre wash tank with tank bottom intake assures maximum pump performance
- Automatic tank level control and heater protection



Wash Capacity	AM60K	
	40 Racks/Hr	60 Racks/Hr
6" Plate	1080	1620
10" Plate	720	1080

Suitable for restaurants, hotels, employee dining with 100~300 seats.

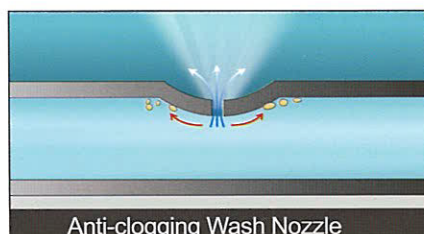

Hobart (Thailand)


43 Thai CC Tower building, Room No.310-311

31st Floor, Sathorn Road, Yannawa, Sathorn, Bangkok, 10120, Thailand

www.hobartthailand.com

Tel +66(2)675 6279-81

Fax +66(2)675 6282

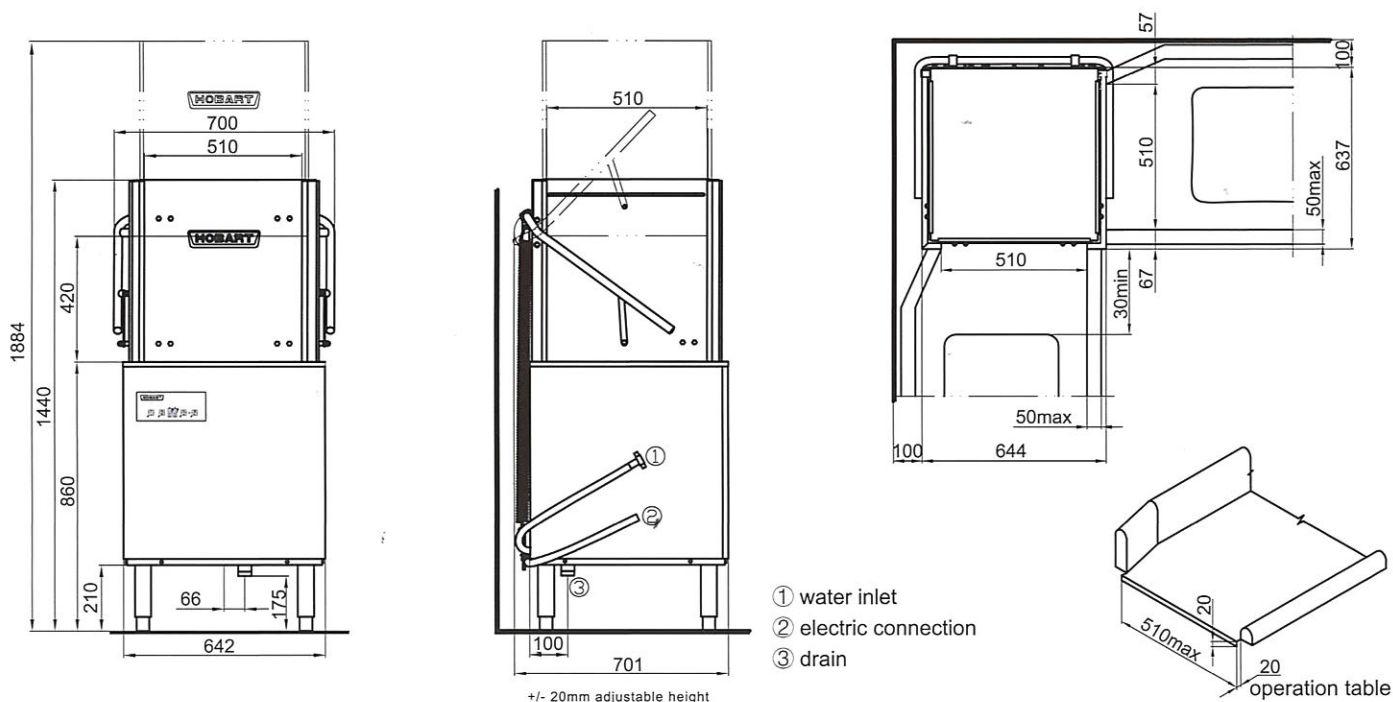

Specification	AM60K
Wash Capacity (Rack/Hr)	60/40
Wash Cycle (s)	60/90
Tank Volume (L)	20
Water Consumption (L/Rack)	3
Electric Connection (V/Hz/Ph)	380/50(60)/3,220/50(60)/3 200/50(60)/3,220/50(60)/1
Wash Pump (kW)	0.8
Tank Heater (kW)	2
Booster Heater (kW)	12/14
Total Loading (kW)	15/17
Door Clearance (mm)	420
Dimensions (mm)	700x701x1440

