

NW 1008 XSafe

Modular Ice Machine 485 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NW 1008
Dice 10 g
W 22 x D 22 x H 22 mm



NW H 1008
Half Dice 6 g
W 10 x D 22 x H 28 mm



NW L 1008
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Remote condenser
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1

RECOMMENDED BINS

| Head | Bins | | kg |
|---------|-------------------------|----------------|-----|
| NW 1008 | ✓ | SB393 | 181 |
| | ✓ | SB530 | 243 |
| | CBT48EAMCD CBT48FMCD | SB948 | 406 |
| | CBT52EAMCD | SB1025 | 478 |
| | ● | UBH1100 | 553 |
| | ● | UBH1600 | 812 |

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

CERTIFICATIONS



OPERATING REQUIREMENTS

| | Minimum | Maximum |
|--------------------|----------------|----------------|
| Air temperature | 10 | 40 |
| Water temperature | 5 | 35 |
| Water pressure | 1 bar (14 psi) | 5 bar (70 psi) |
| Electrical voltage | -10% | +10% |

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 485 kg

NW 1008 XSafe

Scotsman
Ice Systems


Modular Ice Machine 485 kg

Item #:

Project:

Quantity:

Modular Ice Machine 485 kg

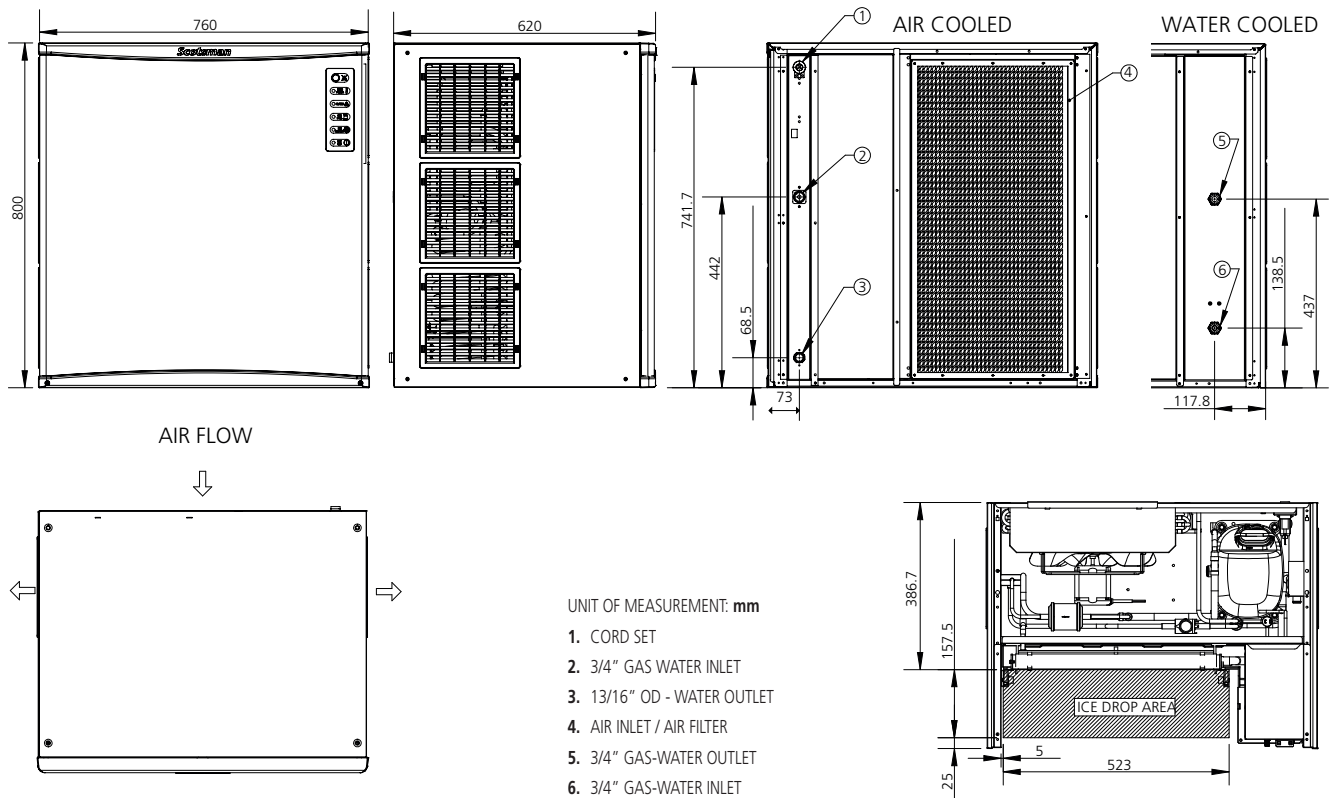

| UNIT DATA | | SHIPPING DATA | | (*) Data refer to 32°C Amb. / 21°C Water temperature conditions | | | | | | | | | |
|------------------|----------|--|-----------------|---|------------------------|--------------------|-----------------|---------------|------------|---------------|----------------|--|--|
| Size (W x D x H) | | 760 x 620 x 800 mm | | Carton (W x D x H) | | 830 x 690 x 990 mm | | | | | | | |
| Net weight | | 105 kg | | Weight | | 122 kg | | | | | | | |
| Version | Voltage | 24 h ice production kg °C Amb. / °C Water | | | Energy consumption (*) | | Water usage (*) | Instant power | Compressor | Circuit wires | Max. fuse size | | |
| | | 10°C/10°C kg | 21°C/10°C kg | 32°C/21°C kg | kWh/ 100 kg | kWh/ 24h | l/h | W | W | No. x Ømm² | A | | |
| NWH 1008 AS | 230/50/1 | 485 | 456 | 380 | 13.2 | 50.3 | 22.3 | 2500 | 7300 | 3 x 2.5 | 30 | | |
| NWH 1008 ASR | 230/50/1 | 475 | 470 | 420 | 14.1 | 59.2 | 25.5 | 2500 | 7300 | 3 x 2.5 | 30 | | |
| NWH 1008 WS | 230/50/1 | 460 | 460 | 410 | 12.1 | 49.7 | 173.2 | 2500 | 7300 | 3 x 2.5 | 30 | | |
| NWL 1008 AS | 230/50/1 | 485 | 456 | 380 | 13.2 | 50.3 | 22.3 | 2500 | 7300 | 3 x 2.5 | 30 | | |
| NWL 1008 ASR | 230/50/1 | 465 | 470 | 420 | 12.8 | 53.7 | 25.1 | 2500 | 7300 | 3 x 2.5 | 30 | | |
| NWL 1008 WS | 230/50/1 | 460 | 450 | 400 | 12.1 | 48.5 | 169.0 | 2500 | 7300 | 3 x 2.5 | 30 | | |
| NW 1008 AS | 230/50/1 | 485 | 456 | 380 | 13.1 | 49.9 | 22.3 | 2500 | 7300 | 3 x 2.5 | 30 | | |
| NW 1008 ASR | 230/50/1 | 470 | 470 | 420 | 13.1 | 55.2 | 24.7 | 2500 | 7300 | 3 x 2.5 | 30 | | |
| NW 1008 WS | 230/50/1 | 460 | 450 | 410 | 12.1 | 49.7 | 173.2 | 2500 | 7300 | 3 x 2.5 | 30 | | |

ติดต่อตัวแทนจำหน่าย

บริษัท เอส.บี. เคมิคอล ซัพพลาย เซอร์วิส จำกัด

เลขที่ 180/17 หมู่ที่ 12 ถนนรัตนพิศาล ต.บางพลีใหญ่ อ.บางพลี จ.สมุทรปราการ 10540

โทร. 02-3250278, 02-3165476 แฟกซ์ 02-3250279

มือถือ 08-1778-0304, 08-9093-2875

www.sbdishwasher.com

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg